


AIRFLOW



AIRFLOW
Air Velocity and Direction
Monitor for Tunnels

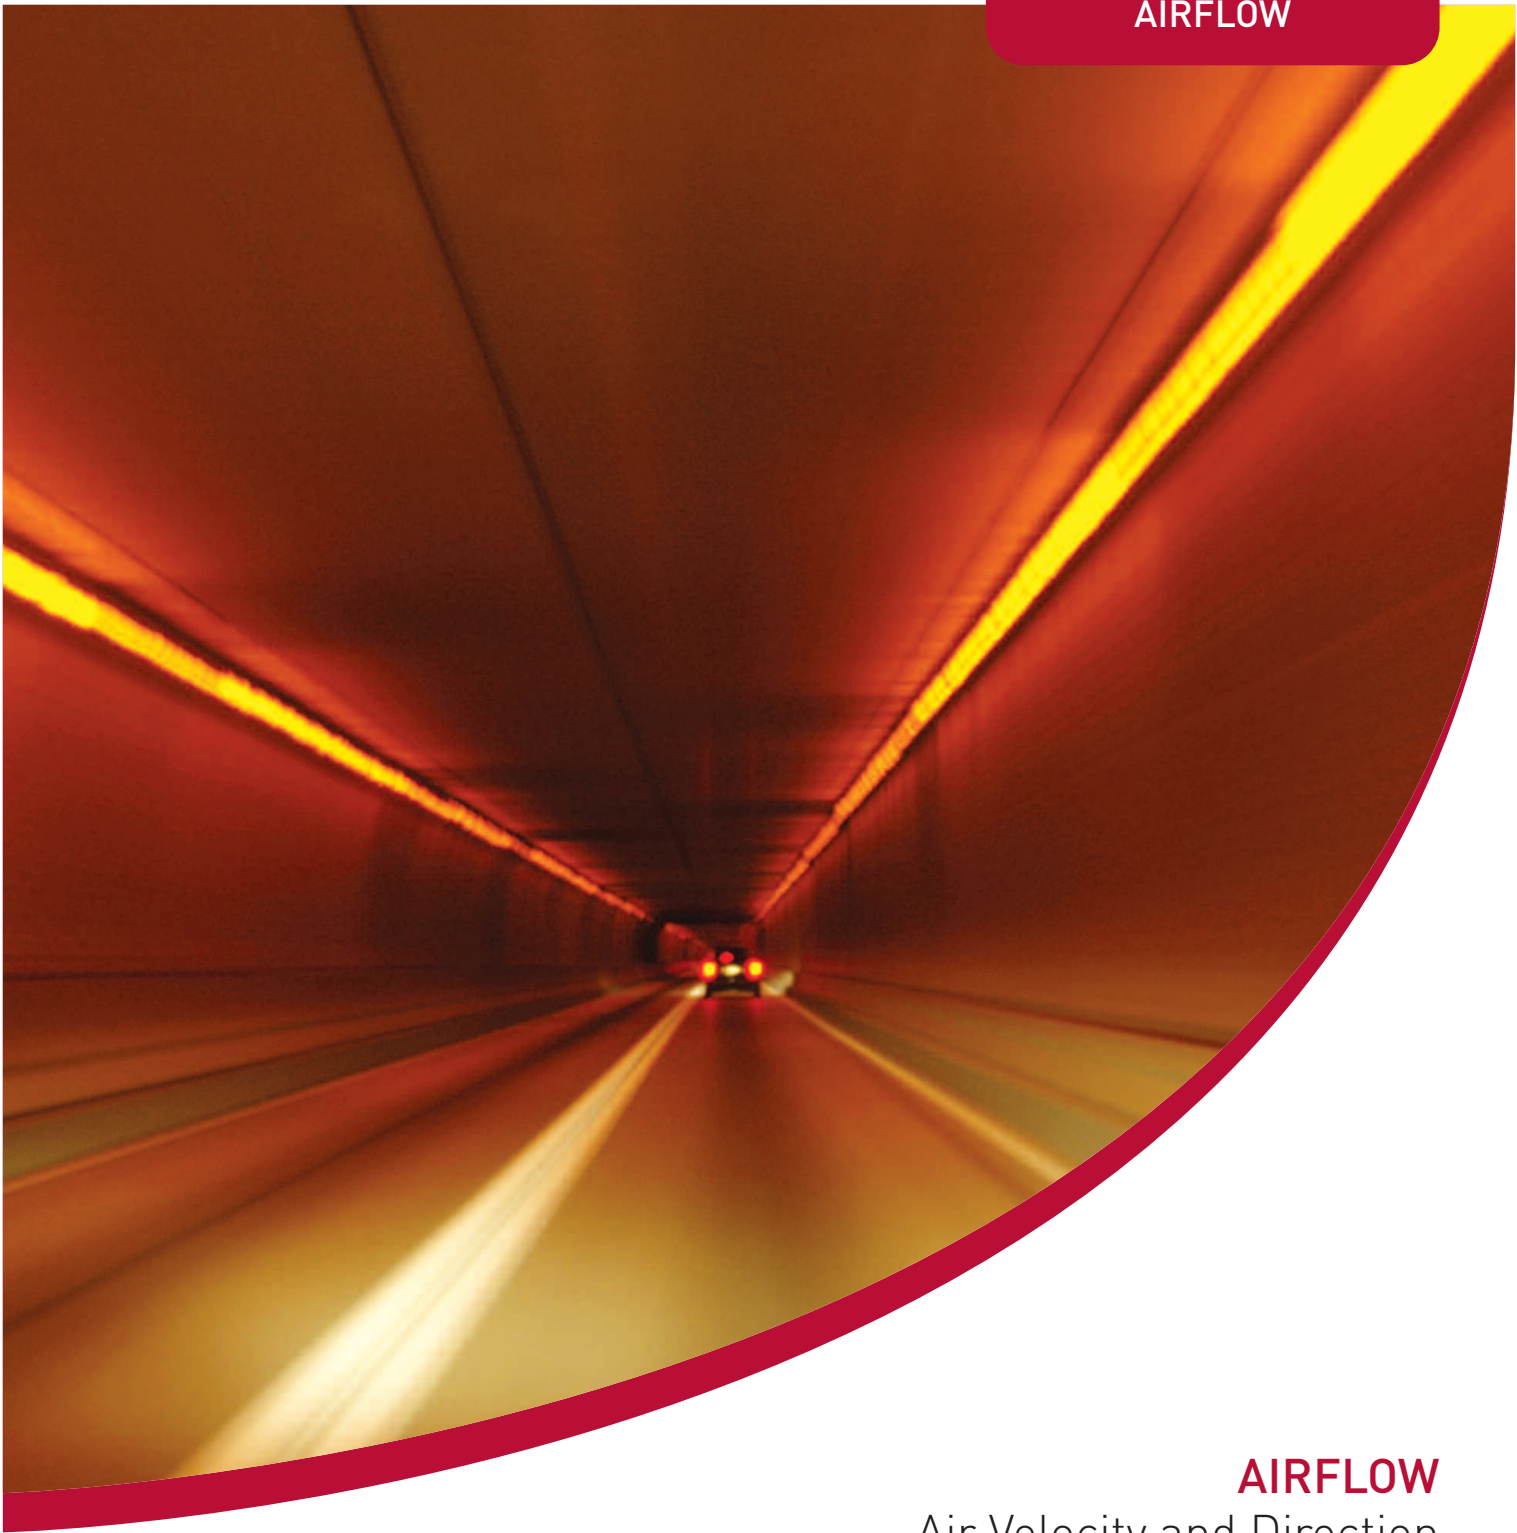

TUNNEL SENSORS

AIRFLOW

Air Velocity and Direction Monitor for Tunnels

FEATURES

- Proven ultrasonic transit time measurement technique
- Measurement independent of the temperature, pressure and composition of the tunnel atmosphere
- Single and dual axis models available
- Optional temperature monitoring facility
- Choice of interface options enabling easy integration into tunnel control system
- IP65 / NEMA 4X rated external enclosure
- Optional Operator Interface with display and keypad



BENEFITS


- Designed specifically for monitoring in tunnels
- Rugged design to withstand corrosive atmosphere and regular tunnel washing
- Simple single point installation on one wall, requiring no alignment and no calibration
- Fixed ultrasonic path length, calibrated when built making it a “fit and forget” monitor
- No moving parts and no regular service requirement
- Flexible integration options

APPLICATIONS

- Traffic tunnels for ventilation control
- Rail tunnels for ventilation control
- Power / cable tunnels
- Mining tunnel applications

OPERATION

The AIRFLOW tunnel monitor is a self contained Transceiver (TRX) designed to be mounted on the tunnel wall. It consists of a square enclosure base, which is populated with four ultrasound transceivers and a reflection “roof”, suspended over the ultrasound transceivers. Ultrasound signals are emitted from the transceivers and are bounced off the “roof”. The reflected signals are then received by the transceivers. The time taken for the ultrasound to travel this reflected path is accurately measured and the velocity (and direction) of air can be calculated.

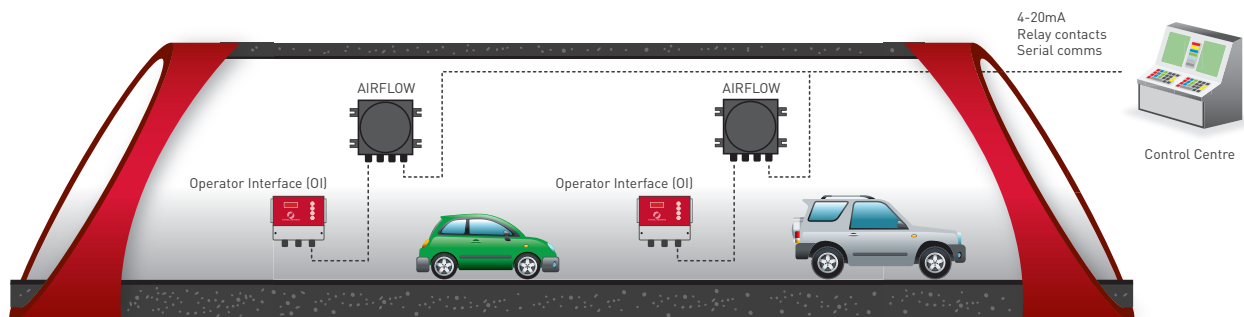

SYSTEM COMPONENTS

- AIRFLOW sensor
- PC based utility software package for set-up and control of the instrument
- Optional Operator Interface with remote or local mounting configurations
- Optional LSZH cable
- Optional variable input AC power supply

TECHNICAL SPECIFICATION

Parameter	Comment
Measuring Principle	Ultrasonic transit time
Measuring Range	+ / - 60 m/s (user selectable)
Accuracy	+ / - 2 %
Response Time	1 – 100 s (selectable)

POWER REQUIREMENTS

Voltage	+24 VDC
Nominal Current Consumption	200 mA
Power Up Current Consumption	200 mA

INTERFACE OPTIONS

Serial Comms	RS485 and ModBus RS232 ProfiBus, DeviceNet, Ethernet (optional interface modules)
Analogue Outputs	4.0 – 20.0 mA (isolated and scalable) 0 – 10 V (isolated and scalable)
Digital Relay Contacts	3 A @ 30 VDC (level alarm and service alarm)

PHYSICAL

Ambient Operating Temperature	-20 - +50 °C (air temperature around the equipment)
Operating Humidity	5 – 100 %
Ingress Protection	IP65 for external use
Materials – Enclosure	Powder coated stainless steel
Materials - Transceiver	Flame retardant UL rated polycarbonate
Dimensions	200 x 200 x 160 mm
Weight	3.5 kg

Tunnel Sensors

A network of local distributors worldwide



Australasia • Europe • Far East • Middle East • South Africa • North America • South America



TUNNEL SENSORS

For further information about our product range please
call +44 (0)1280 850563 or e-mail sales@tunnelsensors.com
and a member of our team will be happy to help.

Tunnel Sensors Limited
Furlong House
Crowfield
Brackley
Northamptonshire
NN13 5TW
United Kingdom

Telephone: +44 (0)1280 850563
Facsimile: +44 (0)1280 850568

E-mail: sales@tunnelsensors.com
Visit: www.tunnelsensors.com

